


Grinding AUTO REST®


GC29222Y-MOD

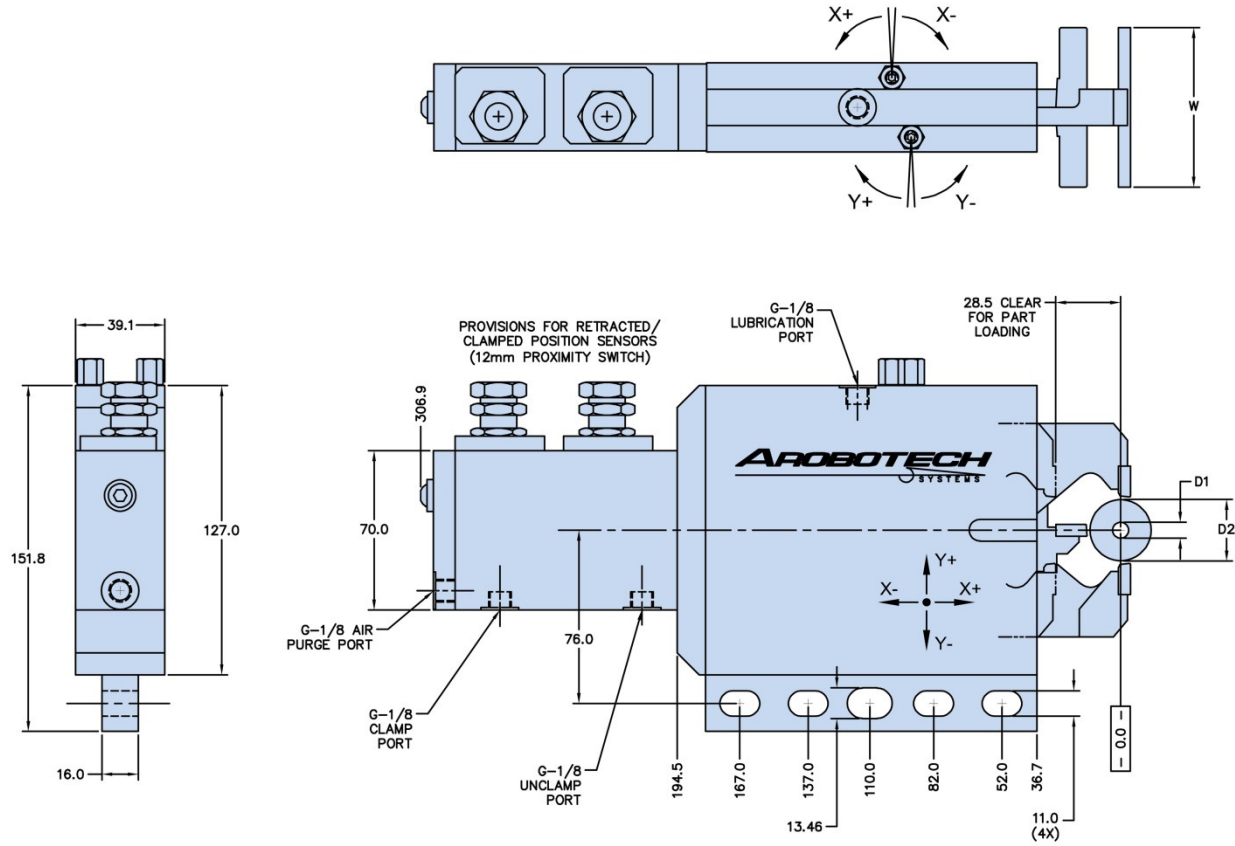

Pad Set **			1	2	3	4	5	6
Minimum Clamp Diameter	D1	mm	3	3	3	7	7	7
Maximum Clamp Diameter	D2	mm	10	10	10	27	27	27
Width	W	mm	15	25	40	20	50	70

** Contact sales@arobotech.com for pads not listed above

X-Axis Adjustment Range	mm	±0.22
Y-Axis Adjustment Range	mm	±0.07
Piston Area	cm ²	6.12
Cylinder Stroke	mm	60
Operating Pressure	bar	15 – 30
Maximum Pressure	bar	45
Air Purge Pressure	bar	0.3 – 0.5
Lubrication Volume	cm ³	0.03 – 0.04
Lubrication Frequency		Working Cycle (or every 6 minutes)
Repeatability	mm	±0.001
Mass	kg	5

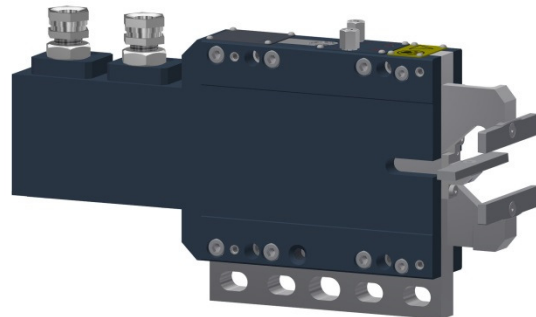

Included Features:

- * Arm Retraction For Part Loading
- * 2-Axis Centerline Adjustment
- * Clamp Position Sensor
- * Retract Position Sensor
- * Air Purge Port

Items Required To Use This Product:

- * Set of Wear Pads
- * Mounting Base